



## Coil Tester & Breaker Supply POB30DL

- Lightweight - only 8 kg
- Powerful – up to 30 A
- Voltage 1 V to 50 V DC
- Ripple free (true DC) voltage
- Output protection
- Fully automatic operation



### Powerful DC power supply for a circuit breaker test

POB30DL is a variable DC voltage power supply unit ideal for testing circuit breakers, where substation battery is not connected or available. The POB30DL is intended to operate breaker coils, and spring charging motors as a part of commissioning and maintenance testing.

POB30DL generates true DC (ripple free) and can test minimum trip voltage of power circuit breakers. Output voltage is selectable from 1 V to 50 V DC.

The POB30DL is powerful and versatile unit, with possibility to generate at 230 V mains supply initial current of 30 A as well as continuous current according to the tables below:

Mains Voltage	Load Voltage	Max Current	Max load interval
115 V/230 V	5V	24 A 20 A 10 A	20 sec 60 sec continuous
	15V	24 A 20 A 10 A	20 sec 60 sec continuous
	25V	24 A 20 A 10 A	20 sec 60 sec continuous

The set is equipped with thermal and overcurrent protection. POB30DL is easy to use and has accessory cable-set with touch-proof contacts.

The POB30DL has very high ability to cancel electrostatic and electromagnetic interference in HV electric fields. It is achieved by very efficient filtration. The filtration is made utilizing proprietary hardware and software.

## Applications

POB30DL is developed for use in switchyards, electric power and industrial environment. An important part of commissioning and maintenance testing is a circuit breaker testing. POB30DL is possible to use for:

- ✓ operating circuit breakers
- ✓ supplying spring-charging motors
- ✓ power supply at test with breaker analyzers
- ✓ minimum trip voltage-test of the circuit breaker's coils


The POB30DL have built-in capability to perform automatic test of minimum trip voltage. The minimum trip voltage test is described in a number of international and national standards such as IEC 62271-100, ANSI C37.09 etc. Many other important parameters are possible to test with a breaker analyzer. POB30DL is then used as a power supply unit. It is compatible with breaker analyzers from different vendors. POB30DL can also be used as general power supply unit or temporary battery charger.

### ***Automatic testing of the minimum trip voltage of a breaker***

Procedure steps:

1. Make certain that the mains are de-energised on both sides of the breaker, safety grounded and that local safety regulations are followed.
2. Connect Power supply unit POB30DL to the breaker's coil circuit.
3. Set the minimal test voltage.
4. Set the step voltage.
5. Set the maximal voltage.
6. Press TRIG button.

### **Connecting a test object to POB30DL**

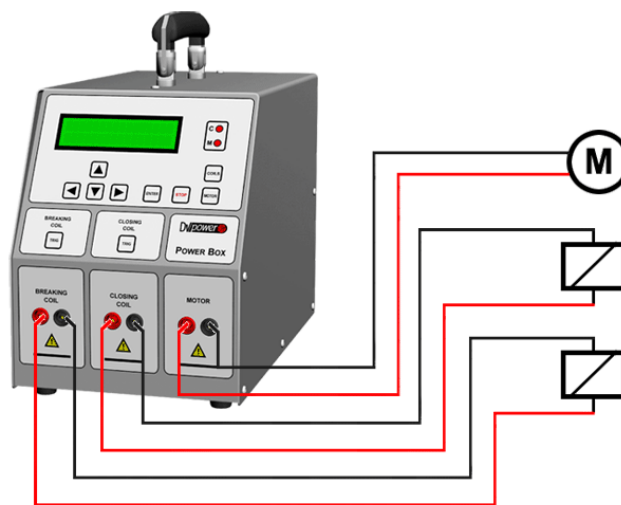

**Included accessories**

- ✓ Mains power cable
- ✓ Ground (PE) cable

**Recommended accessories**

- ✓ Cable set 6 x 2 m 2,5 mm<sup>2</sup>
- ✓ Device bag
- ✓ Cable bag

**Optional accessories**

- ✓ Cable set 6 x 5 m 2,5 mm<sup>2</sup>
- ✓ Transport case



*Transport case*



*Cable set*

**Ordering information:**

Art.No.	Description
<b>POB30DC-N-01</b>	POB30DL device with ground cable
<b>C6-02-02BPBP</b>	Cable set 6 x 2 m 2,5 mm <sup>2</sup>
<b>DEVIC-BAG-00</b>	Device bag
<b>CABLE-BAG-00</b>	Cable bag*

Art.No.	Description
<b>C6-05-02BPBP</b>	Cable set 6 x 5 m 2,5 mm <sup>2</sup>
<b>HARD-CASE-00</b>	Transport case

## Technical data

### 1 - Mains Power Supply

- Connection according to IEC/EN60320-1; UL498, CSA 22.2
- Voltage single phase 110 V – 240 V AC, +10% - -15%
- Frequency 50/60 Hz

### 2 - Output data

- Coils output DC Voltage 1 V to 50 V DC
- Motor output DC Voltage 1 V to 50 V DC
- Output Current max 30 A

### 3 – Measurement

- Voltage 1 V – 50 V DC
- Current 1 A – 50 A
- Accuracy  $\pm(0,5\% \text{ rdg} + 0,5\% \text{ FS})$

### 4- Environment conditions

- Operating temperature  $-10^{\circ}\text{C} - +55^{\circ}\text{C} / 14^{\circ}\text{F} - +131^{\circ}\text{F}$
- Storage and transportation  $-40^{\circ}\text{C} - +70^{\circ}\text{C} / -13^{\circ}\text{F} - +158^{\circ}\text{F}$
- Humidity 5% – 95% relative humidity, non-condensing

### 5 - Dimensions and Weight

- Dimensions 198 mm x 255 mm x 380 mm  
7,8 in x 10 in x 15 in  
(W x H x D) without handle
- Weight 8 kg / 17,5 lbs

### 6- Mechanical protection

IP43

### 7- Warranty

three years

### 8 – Safety Standards

- European standards LVD 2006/95/EC  
EN 61010-1
- International standards IEC 61010-1  
UL 61010-1  
CAN/CSA-C22.2 No. 61010-1, 2nd edition, including Amendment 1

### 9 – Electromagnetic Compatibility (EMC)

- CE conformity EMC directive 2004/108/EC
- Emission EN 61326-1
- Immunity EN 61326-1

All specifications herein are valid at ambient temperature of + 25 °C and recommended accessories.  
Specifications are subject to change without notice.